



PU-SC**PU-protection sleeve,
single and double-sided**

Made from cut resistant polyurethane

With inner fabric insert to ease sliding of the sleeve on the webbing. Standard length 2 and 4 m.

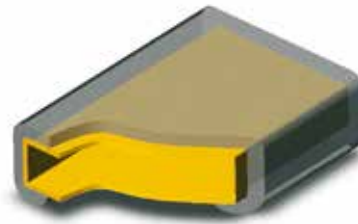

PU-protection sleeve single-sided,
PU-SC-1

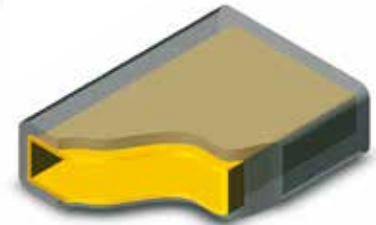

PU-protection sleeve,
PU-SC-2

INFO

Lengths over 4 m on request.

Technical data PU-SC, single-sided

Model	Art.-No.	For webbing width	Dimensions	Height
		mm	outside / inside mm	mm
PU-SC1-030	N39120011	30	50 / 40	22
PU-SC1-050	N39120001	50	70 / 60	22
PU-SC1-060	N39120002	60	80 / 70	22
PU-SC1-090	N39120004	90	110 / 100	22
PU-SC1-120	N39120012	120	145 / 135	22
PU-SC1-150	N39120007	150	170 / 160	22
PU-SC1-180	N39120008	180	200 / 190	22
PU-SC1-240	N39120009	240	260 / 250	31
PU-SC1-300	N39120010	300	330 / 320	31

Technical data PU-SC, double-sided

Model	Art.-No.	For webbing width	Dimensions	Height
		mm	outside / inside mm	mm
PU-SC2-030	N39130014	30	50 / 40	22
PU-SC2-050	N39130001	50	70 / 60	22
PU-SC2-060	N39130002	60	80 / 70	22
PU-SC2-090	N39130004	90	110 / 100	22
PU-SC2-120	N39130007	120	145 / 135	22
PU-SC2-150	N39130009	150	170 / 160	22
PU-SC2-180	N39130011	180	200 / 190	22
PU-SC2-240	N39130012	240	260 / 250	31
PU-SC2-300	N39130013	300	330 / 320	31

INFO

Double PU sleeves cannot be fitted subsequently on webbing slings with steel links. If required, state sleeve length when placing the webbing sling order.



PU-KSW PU-edge protector

Made from cut resistant polyurethane
With slots to allow easy attachment and fixing on the round sling.

Technical data PU-KSW

Model	Art.-No.	Diameter mm	Length mm	Suitable for round slings up to WLL kg
PU-KSW-30	N39160006	30	80	3000
PU-KSW-50	N39160007	50	125	5000



PU-SG Round sleeve

With fabric insert and PU-coating
Economical solution to protect webbing slings and round slings against wear caused by abrasion.

INFO

Not suitable for protection against sharp edges.


Technical data PU-SG

Model	Art.-No.	Width approx. mm	Diameter mm	Suitable for round slings up to WLL kg
PU-SG-040	N39140001	60	40	2000
PU-SG-063	N39140002	95	63	3000
PU-SG-075	N39140003	115	75	6000
PU-SG-090	N39140004	140	90	8000
PU-SG-110	N39140005	170	110	10000
PU-SG-150	N39140006	230	150	15000


PU-FB PU-coating, single and double-sided

Made from transparent polyurethane

Extremely wear and cut resistant. The coating is permanently fixed to the webbing and cannot be lost during usage.

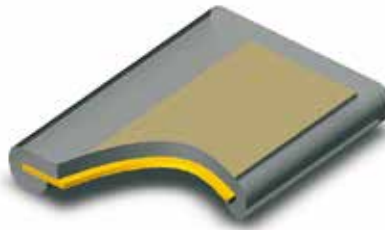

Coating single-sided,
PU-FB 1

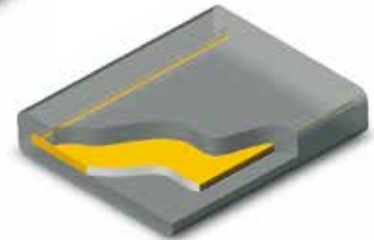


Coating double-sided,
PU-FB 2

Technical data PU-FB, single-sided

Model	Art.-No.	For webbing width mm	Width mm
PU-FB1-030	N39100009	30	40
PU-FB1-050	N39100001	50	60
PU-FB1-060	N39100002	60	70
PU-FB1-090	N39100003	90	100
PU-FB1-120	N39100004	120	130
PU-FB1-150	N39100005	150	160
PU-FB1-180	N39100006	180	190
PU-FB1-240	N39100007	240	250
PU-FB1-300	N39100008	300	310

Technical data PU-FB, double-sided

Model	Art.-No.	For webbing width mm	Width mm
PU-FB2-030	N39110009	30	40
PU-FB2-050	N39110001	50	60
PU-FB2-060	N39110002	60	70
PU-FB2-090	N39110003	90	100
PU-FB2-120	N39110004	120	130
PU-FB2-150	N39110005	150	160
PU-FB2-180	N39110006	180	190
PU-FB2-240	N39110007	240	250
PU-FB2-300	N39110008	300	310



PU-KSE Edge protection profile

From colour coded polyurethane, extremely abrasive and cut resistant.

Technical data PU-KSE

Model	Art.-No.	Colour mm	For webbing width mm	Width mm
PU-KSE-065	N39160023	green	60	100
PU-KSE-100	N39160024	yellow	90	135
PU-KSE-125	N39160025	grey	120	160
PU-KSE-150	N39160026	red	150	185
PU-KSE-200	N39160027	black	180	225
PU-KSE-300	N39160028	orange	300	330



PU-KSE-MAG Edge protection profile with magnets

From colour coded polyurethane, extremely abrasive and cut resistant.

Technical data PU-KSE-MAG

Model	Art.-No.	Colour mm	For webbing width mm	Width mm	Number of magnets
PU-KSE-065-MAG	N39160029	green	60	100	2
PU-KSE-100-MAG	N39160030	yellow	90	135	4
PU-KSE-125-MAG	N39160031	grey	120	160	4
PU-KSE-150-MAG	N39160032	red	150	185	4
PU-KSE-200-MAG	N39160033	black	180	225	6
PU-KSE-300-MAG	N39160034	orange	300	330	8